
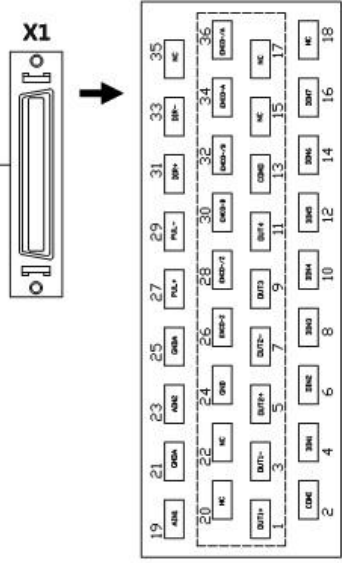




Описание коммуникационных портов сервоусилителей CDII

LED дисплей и кнопки управления																																																																																	
Интерфейс ввода/вывода	<p style="text-align: center;">X1</p> <table border="1"> <thead> <tr> <th>#</th><th>Сигнал</th><th>#</th><th>Сигнал</th><th>#</th><th>Сигнал</th><th>#</th><th>Сигнал</th></tr> </thead> <tbody> <tr><td>2</td><td>COM1</td><td>1</td><td>OUT1+</td><td>20</td><td>NC</td><td>19</td><td>AIN1</td></tr> <tr><td>4</td><td>DIN1</td><td>3</td><td>OUT1-</td><td>22</td><td>NC</td><td>21</td><td>GND A</td></tr> <tr><td>6</td><td>DIN2</td><td>5</td><td>OUT2+</td><td>24</td><td>GND</td><td>23</td><td>AIN2</td></tr> <tr><td>8</td><td>DIN3</td><td>7</td><td>OUT2-</td><td>26</td><td>ENZO-Z</td><td>25</td><td>GND A</td></tr> <tr><td>10</td><td>DIN4</td><td>9</td><td>OUT3</td><td>28</td><td>ENZO-/Z</td><td>27</td><td>PUL+</td></tr> <tr><td>12</td><td>DIN5</td><td>11</td><td>OUT4</td><td>30</td><td>ENZO-B</td><td>29</td><td>PUL-</td></tr> <tr><td>14</td><td>DIN6</td><td>13</td><td>COM0</td><td>32</td><td>ENZO-/B</td><td>31</td><td>DIR+</td></tr> <tr><td>16</td><td>DIN7</td><td>15</td><td>NC</td><td>34</td><td>ENZO-A</td><td>33</td><td>DIR-</td></tr> <tr><td>18</td><td>NC</td><td>17</td><td>NC</td><td>36</td><td>ENZO-/A</td><td>35</td><td>NC</td></tr> </tbody> </table>		#	Сигнал	#	Сигнал	#	Сигнал	#	Сигнал	2	COM1	1	OUT1+	20	NC	19	AIN1	4	DIN1	3	OUT1-	22	NC	21	GND A	6	DIN2	5	OUT2+	24	GND	23	AIN2	8	DIN3	7	OUT2-	26	ENZO-Z	25	GND A	10	DIN4	9	OUT3	28	ENZO-/Z	27	PUL+	12	DIN5	11	OUT4	30	ENZO-B	29	PUL-	14	DIN6	13	COM0	32	ENZO-/B	31	DIR+	16	DIN7	15	NC	34	ENZO-A	33	DIR-	18	NC	17	NC	36	ENZO-/A	35
#	Сигнал	#	Сигнал	#	Сигнал	#	Сигнал																																																																										
2	COM1	1	OUT1+	20	NC	19	AIN1																																																																										
4	DIN1	3	OUT1-	22	NC	21	GND A																																																																										
6	DIN2	5	OUT2+	24	GND	23	AIN2																																																																										
8	DIN3	7	OUT2-	26	ENZO-Z	25	GND A																																																																										
10	DIN4	9	OUT3	28	ENZO-/Z	27	PUL+																																																																										
12	DIN5	11	OUT4	30	ENZO-B	29	PUL-																																																																										
14	DIN6	13	COM0	32	ENZO-/B	31	DIR+																																																																										
16	DIN7	15	NC	34	ENZO-A	33	DIR-																																																																										
18	NC	17	NC	36	ENZO-/A	35	NC																																																																										
Интерфейс RS232		<p style="text-align: center;">RS232</p> <table border="1"> <thead> <tr> <th>#</th><th>Сигнал</th></tr> </thead> <tbody> <tr><td>1</td><td>NC</td></tr> <tr><td>2</td><td>TX</td></tr> <tr><td>3</td><td>RX</td></tr> <tr><td>4</td><td>NC</td></tr> <tr><td>5</td><td>GND</td></tr> <tr><td>6</td><td>NC</td></tr> <tr><td>7</td><td>NC</td></tr> <tr><td>8</td><td>NC</td></tr> <tr><td>9</td><td>NC</td></tr> </tbody> </table>	#	Сигнал	1	NC	2	TX	3	RX	4	NC	5	GND	6	NC	7	NC	8	NC	9	NC																																																											
#	Сигнал																																																																																
1	NC																																																																																
2	TX																																																																																
3	RX																																																																																
4	NC																																																																																
5	GND																																																																																
6	NC																																																																																
7	NC																																																																																
8	NC																																																																																
9	NC																																																																																
Интерфейс энкодера мотора		<p style="text-align: center;">ENCODER IN</p> <table border="1"> <thead> <tr> <th>#</th><th>Сигнал</th></tr> </thead> <tbody> <tr><td>1</td><td>+5V</td></tr> <tr><td>2</td><td>A</td></tr> <tr><td>3</td><td>B</td></tr> <tr><td>4</td><td>Z</td></tr> <tr><td>5</td><td>U</td></tr> <tr><td>6</td><td>V</td></tr> <tr><td>7</td><td>W</td></tr> <tr><td>8</td><td>PTC_IN</td></tr> <tr><td>9</td><td>GND</td></tr> <tr><td>10</td><td>/A</td></tr> <tr><td>11</td><td>/B</td></tr> <tr><td>12</td><td>/Z</td></tr> <tr><td>13</td><td>/U</td></tr> <tr><td>14</td><td>/V</td></tr> <tr><td>15</td><td>/W</td></tr> </tbody> </table>	#	Сигнал	1	+5V	2	A	3	B	4	Z	5	U	6	V	7	W	8	PTC_IN	9	GND	10	/A	11	/B	12	/Z	13	/U	14	/V	15	/W																																															
#	Сигнал																																																																																
1	+5V																																																																																
2	A																																																																																
3	B																																																																																
4	Z																																																																																
5	U																																																																																
6	V																																																																																
7	W																																																																																
8	PTC_IN																																																																																
9	GND																																																																																
10	/A																																																																																
11	/B																																																																																
12	/Z																																																																																
13	/U																																																																																
14	/V																																																																																
15	/W																																																																																